


TEREX CTT 231 -10

UDŹWIG MAKSYMALNY 10 TON

 **HERKULES**

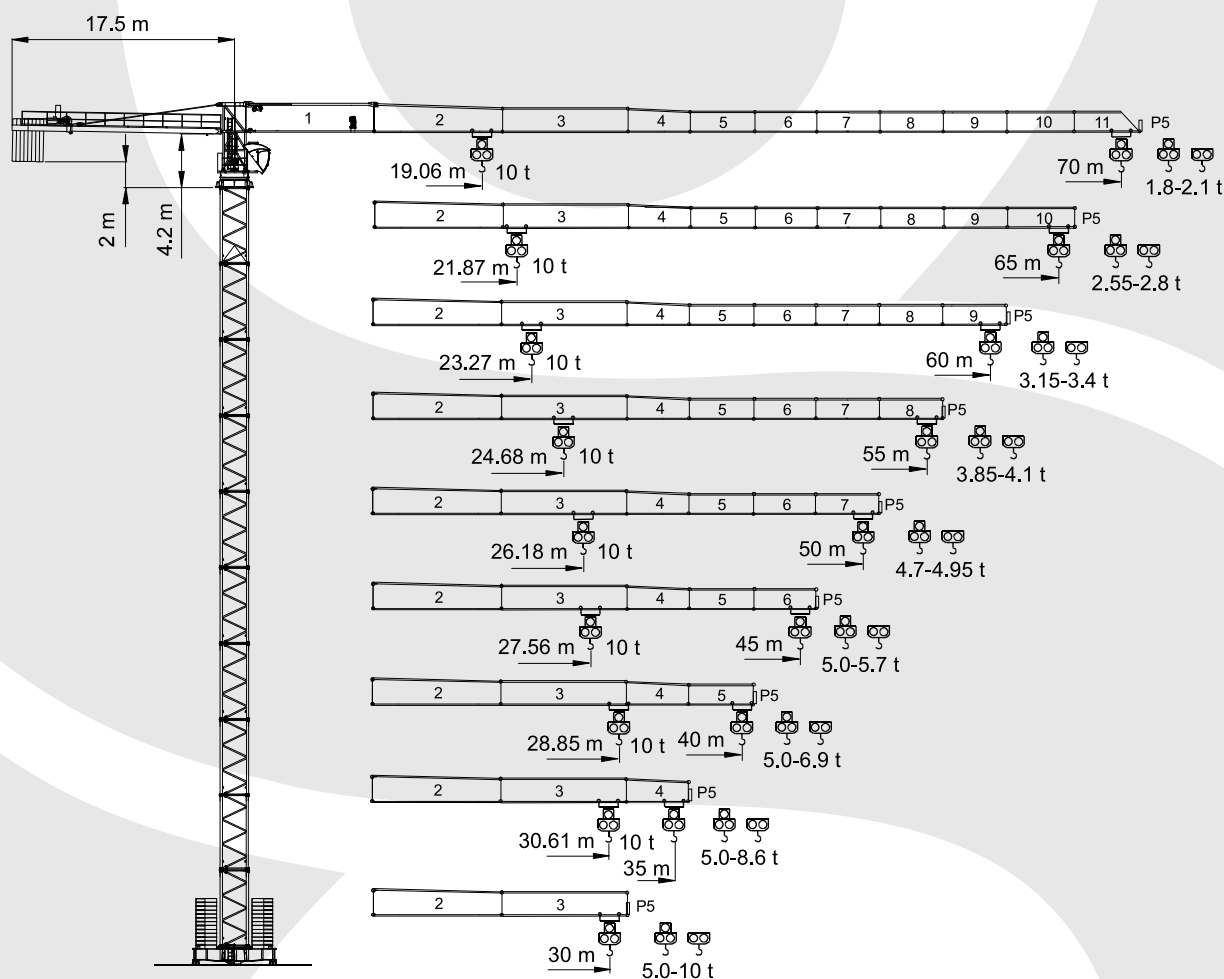

DANE TECHNICZNE:

UDŹWIG MAKSYMALNY: 10 TON

DŁUGOŚĆ WYSIĘGNIKA: 70 M

UDŹWIG NA MAKSYMALNYM WYSIĘGU: 1,80 TONY

TEREX CTT 231 -10


UDŹWIG MAKSYMALNY 10 TON




Tabela udźwągów

				m	20	25	30	35	40	45	50	55	60	65	70
5 t	-	35,58 m	t	5,0	5,0	5,0	5,0	5,0	4,34	3,76	3,29	2,91	2,59	2,33	2,10
5 t	-	33,88 m	t	5,0	5,0	5,0	5,0	4,80	4,04	3,46	2,99	2,61	2,29	2,03	1,80
10 t	-	19,06 m	t	9,45	7,26	5,82	4,80	4,04	3,46	2,99	2,61	2,29	2,03	1,80	
5 t	-	40,67 m	t	5,0	5,0	5,0	5,0	5,0	4,43	3,90	3,46	3,10	2,80		
5 t	-	39,13 m	t	5,0	5,0	5,0	5,0	4,87	4,19	3,66	3,22	2,86	2,55		
10 t	-	21,87 m	t	10,0	8,56	6,91	5,74	4,87	4,19	3,66	3,22	2,86	2,55		
5 t	-	43,62 m	t	5,0	5,0	5,0	5,0	5,0	4,82	4,25	3,79	3,40			
5 t	-	41,84 m	t	5,0	5,0	5,0	5,0	5,0	4,57	4,0	3,54	3,15			
10 t	-	23,27 m	t	10,0	9,21	7,45	6,21	5,28	4,57	4,0	3,54	3,15			
5 t	-	46,53 m	t	5,0	5,0	5,0	5,0	5,0	5,0	4,59	4,10				
5 t	-	44,58 m	t	5,0	5,0	5,0	5,0	5,0	4,94	4,34	3,85				
10 t	-	24,68 m	t	10,0	9,85	7,99	6,68	5,70	4,94	4,34	3,85				
5 t	-	49,57 m	t	5,0	5,0	5,0	5,0	5,0	5,0	4,95					
5 t	-	47,51 m	t	5,0	5,0	5,0	5,0	5,0	5,0	4,7					
10 t	-	26,18 m	t	10,0	10,0	8,56	7,17	6,14	5,34	4,7					
5 t	-	45,00 m	t	5,0	5,0	5,0	5,0	5,0	5,0						
5 t	-	45,00 m	t	5,0	5,0	5,0	5,0	5,0	5,0						
10 t	-	27,56 m	t	10,0	10,0	9,09	7,63	6,54	5,7						
5 t	-	40,00 m	t	5,0	5,0	5,0	5,0	5,0							
5 t	-	40,00 m	t	5,0	5,0	5,0	5,0	5,0							
10 t	-	28,85 m	t	10,0	10,0	9,57	8,04	6,9							
5 t	-	35,00 m	t	5,0	5,0	5,0	5,0								
5 t	-	35,00 m	t	5,0	5,0	5,0	5,0								
10 t	-	30,61 m	t	10,0	10,0	10,0	8,6								
5 t	-	30,00 m	t	5,0	5,0	5,0									
5 t	-	30,00 m	t	5,0	5,0	5,0									
10 t	-	30,00 m	t	10,0	10,0	10,0									

Inne konfiguracje

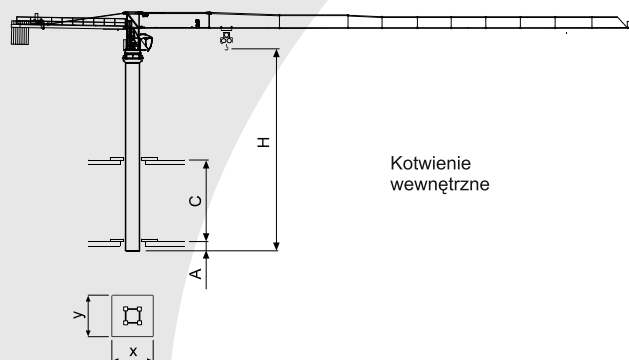

Kotwienie wewnętrzne

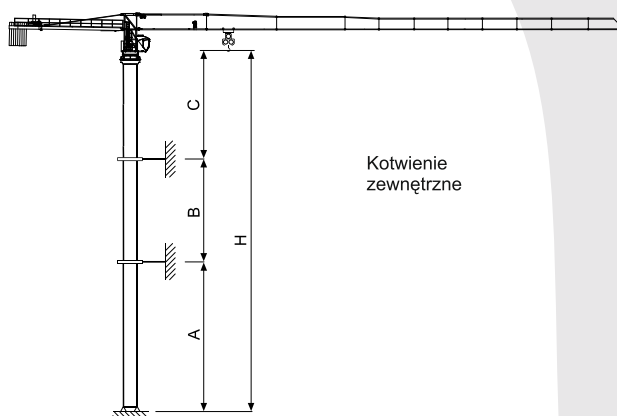

Kotwienie zewnętrzne






TEREX CTT 231 -10

UDŹWIG MAKSYMALNY 10 TON

HERKULES

Konfiguracja wieży

TS23

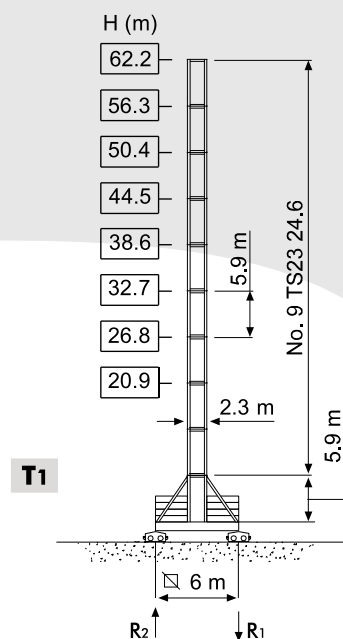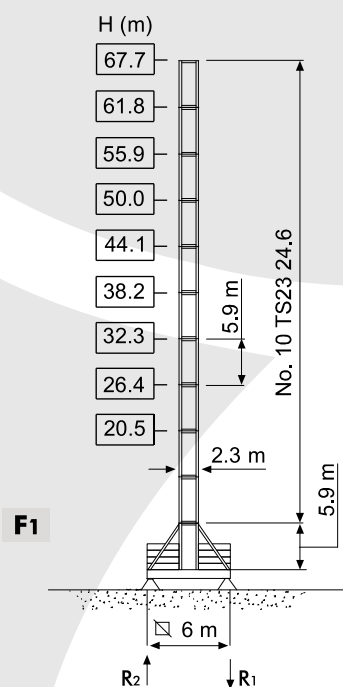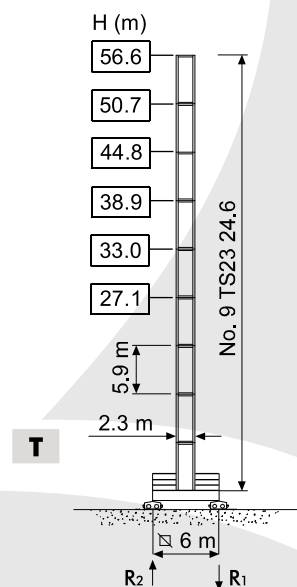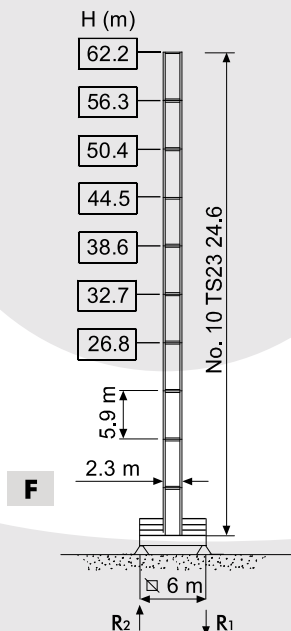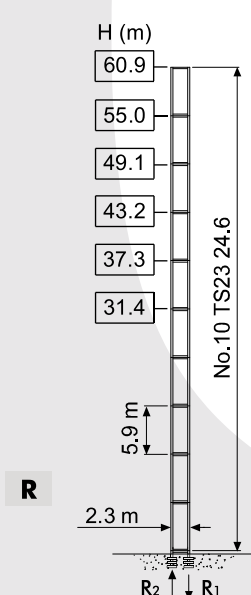

H Max. wysokość pod hakiem
• podczas pracy
◊ poza pracą
masa żurawia, bez balastu,
max wysięgnik, max wysokość

TEREX CTT 231 -10

UDŹWIG MAKSYMALNY 10 TON



Mechanizmy

		€	⚡	👂
	37 AFC 50	86 * kVA	400 V - 50 Hz / 460 V - 60 Hz	2000/14/CE

* Żuraw bez układu jezdniego

	37 AFC 50 (VECTOR)		m/min	†	kW	długość liny (m)
			0 → 2	5		
			2 → 8	5		
			8 → 33	5		
			33 → 66	2.2		
			66 → 92	0.9		
			0 → 1	10	37	527 m
			4 → 4	10		
			16 → 16	10		
			16 → 33	4.4		
			33 → 46	1.8		

	DVF 3 6	0 → 37 → 74 m/min	5.5 kW
	SCC 2 2 112 L	0.88 obr/min	2 x 15 kW
	TSR 2RG 4MB	12 → 24 m/min (50Hz) 14 → 48 m/min (50Hz)	4 x 80 Nm

	Przesuw wózka
	Podnoszenie
	Obrót
	Jazda
	Dyrektywa odnośnie poziomu akustycznego
	Całkowita moc zainstalowana
	Zasilanie