


TEREX CTT 91-5

UDŹWIG MAKSYMALNY 5 TON

HERKULES

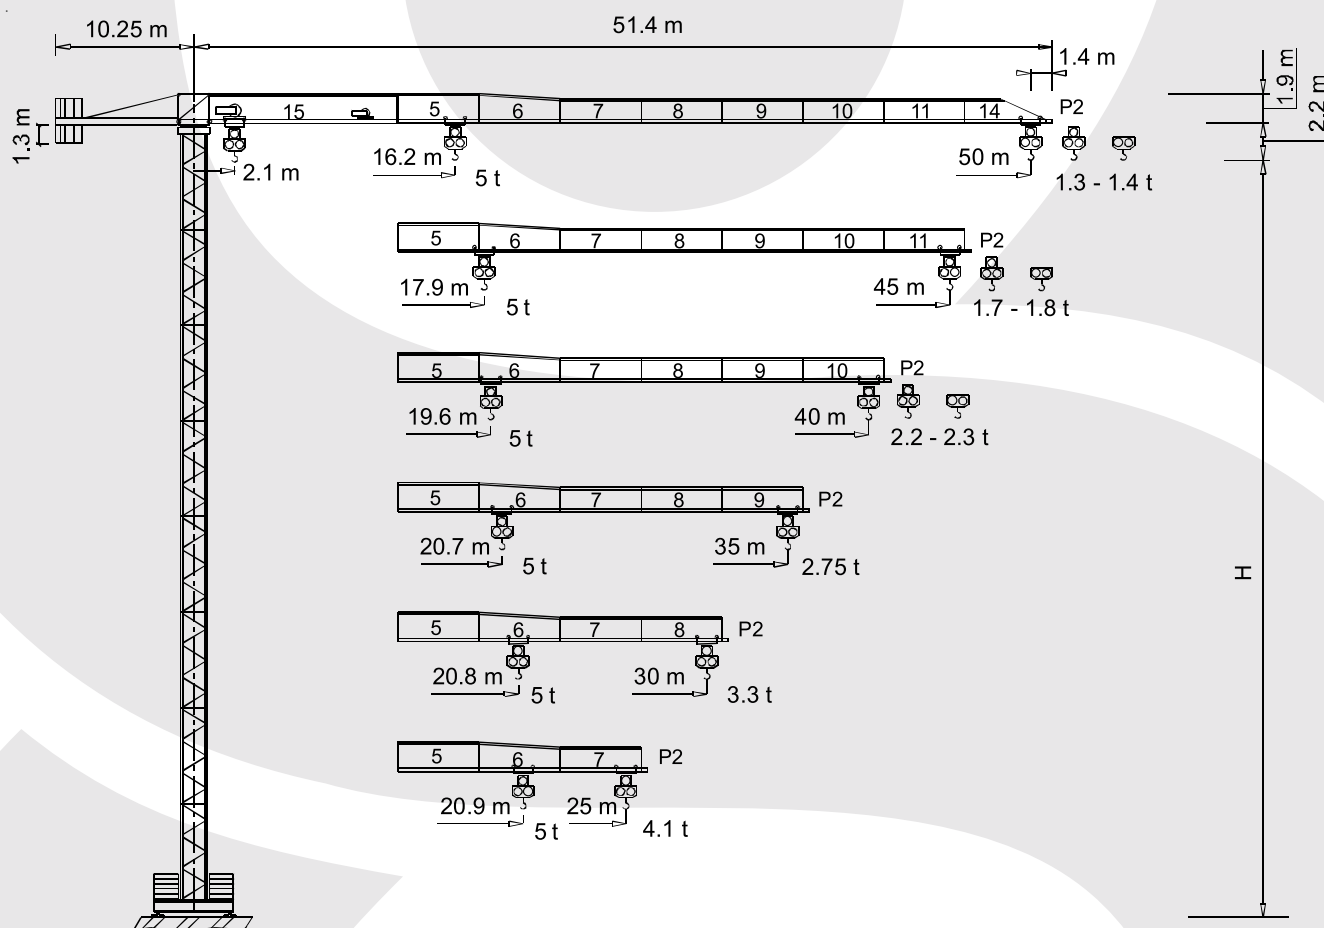

DANE TECHNICZNE:

UDŹWIG MAKSYMALNY: 5 TON

DŁUGOŚĆ WYSIĘGNIKA: 50 M

UDŹWIG NA MAKSYMALNYM WYSIĘGU: 1,3 TONY

HERKULES

www.gzsa.pl

TEREX CTT 91-5


UDŹWIG MAKSYMALNY 5 TON



Tabela udźwigów

				m	5	10	15	20	25	30	35	40	45	50
	2.5 t	-	30.63	m	2.5	2.5	2.5	2.5	2.5	2.5	2.14	1.83	1.59	1.4
	2.5 t	-	29.53	m	2.5	2.5	2.5	2.5	2.5	2.45	2.04	1.73	1.49	1.3
	5 t	-	16.16	m	5	5	5	3.93	3.04	2.45	2.04	1.73	1.49	1.3
	2.5 t	-	33.93	m	2.5	2.5	2.5	2.5	2.5	2.5	2.41	2.07	1.8	
	2.5 t	-	32.74	m	2.5	2.5	2.5	2.5	2.5	2.5	2.31	1.97	1.7	
	5 t	-	17.88	m	5	5	5	4.41	3.42	2.77	2.31	1.97	1.7	
	2.5 t	-	37.19	m	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.3		
	2.5 t	-	35.92	m	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.2		
	5 t	-	19.58	m	5	5	5	4.88	3.8	3.08	2.58	2.2		
	2.5 t	-	35	m	2.5	2.5	2.5	2.5	2.5	2.5	2.5			
	5 t	-	20.68	m	5	5	5	5	4.04	3.29	2.75			
	2.5 t	-	30	m	2.5	2.5	2.5	2.5	2.5	2.5				
	5 t	-	20.76	m	5	5	5	5	4.06	3.3				
	2.5 t	-	25	m	2.5	2.5	2.5	2.5	2.5					
	5 t	-	20.94	m	5	5	5	5	4.1					

Inne konfiguracje

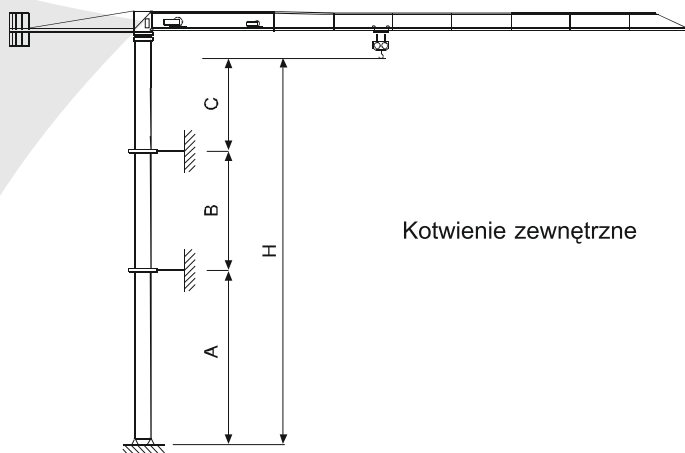


TEREX CTT 91-5

UDŹWIG MAKSYMALNY 5 TON



Konfiguracja wieży

TS12

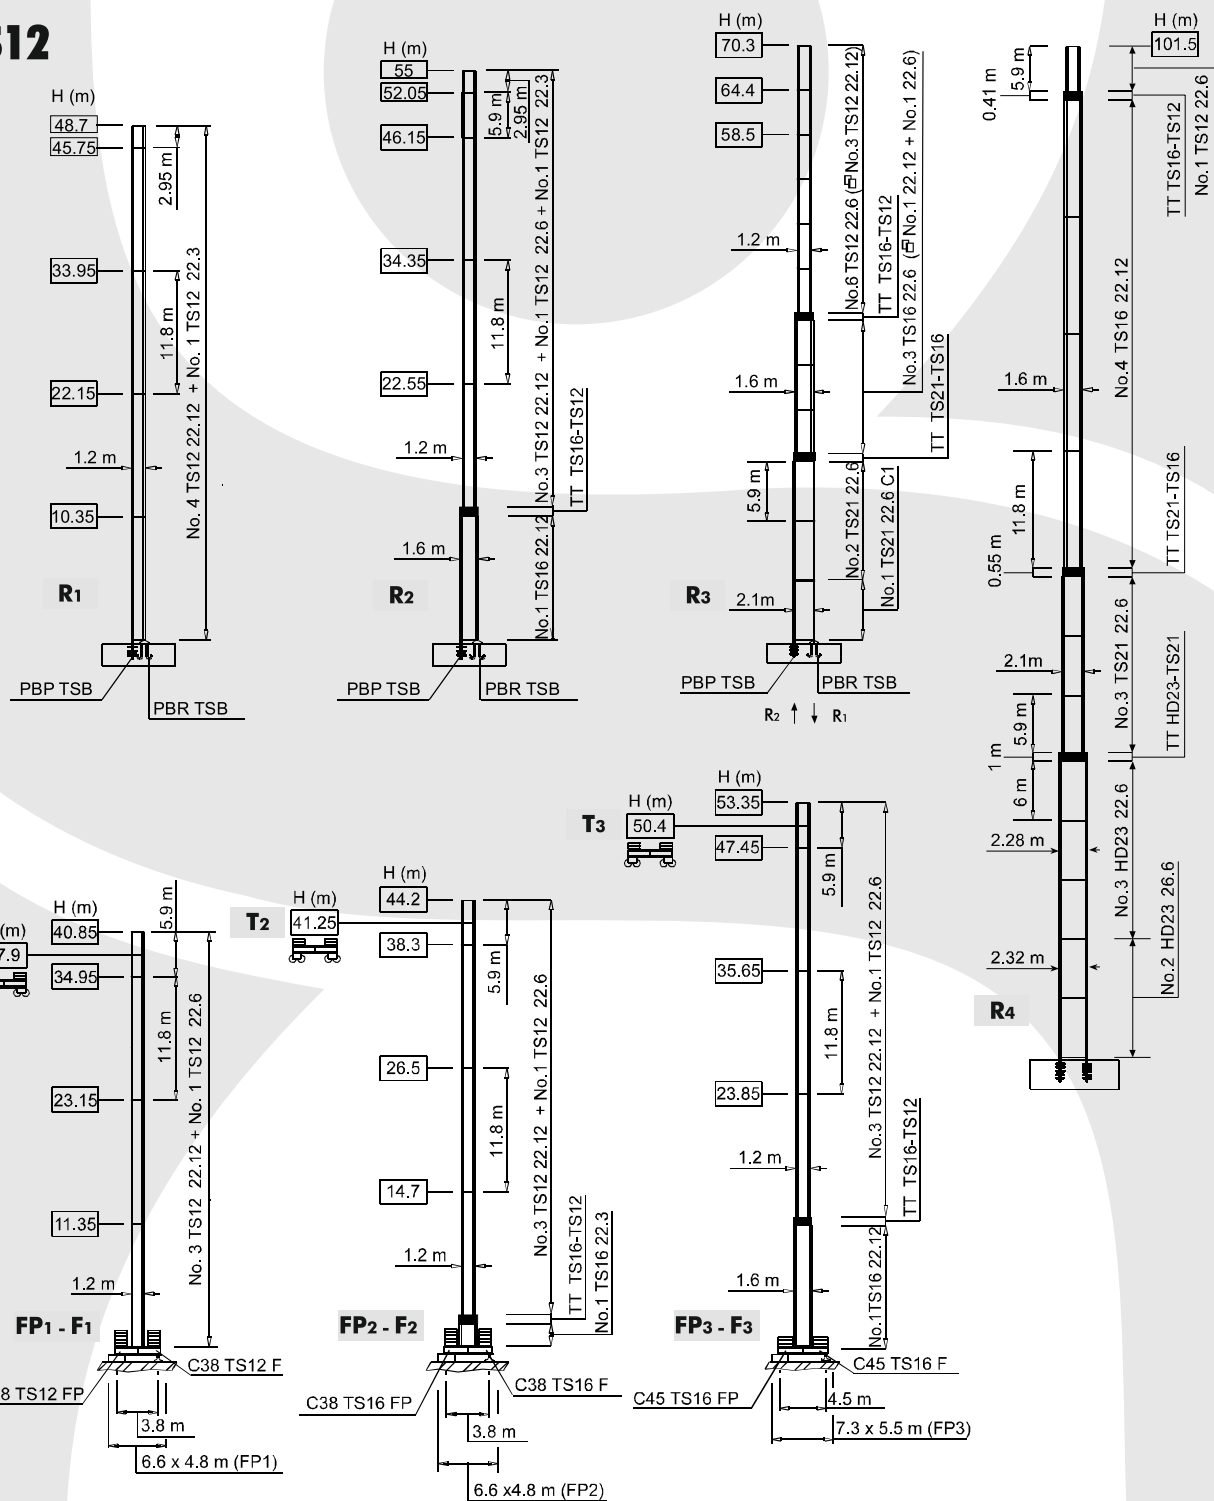

TEREX CTT 91-5

UDŹWIG MAKSYMALNY 5 TON

HERKULES

Mechanizmy

	€	⚡	🎧
	11 APC 25	31* KVA	2000/14/CE
	15 AFC 25	40* KVA	
	18 AFC 25	41* KVA	
		400 V - 50 Hz	
		400 V - 50 Hz/ 460 V - 60 Hz	

* Żuraw bez układu jezdznego

			m/min	†	kW	długość liny (m)
	11 APC 25		6	2.5	11	186 m
			20	2.5		
			40	1.25		
			3	5		
			10	2.5		
			20	2.5		
	15 AFC 25 (WARIANT)		0 → 1.7	2.5	15	186 m
			1.7 → 6	2.5		
			6 → 28	2.5		
			28 → 46	1.44		
			46 → 57	1.1		
			0 → 0.85	5		
			0.85 → 3	5		
			3 → 14	5		
			14 → 23	2.88		
			23 → 28.5	2.2		
			0 → 2.2	2.5		
			2.2 → 8	2.5		
			8 → 34	2.5		
			34 → 55	1.46		
			55 → 69	1.1		
			0 → 1.1	5		
			1.1 → 4	5		
			4 → 17	5		
			17 → 27.5	2.92		
			27.5 → 27.5	2.2		

	DAD 2 2 D1	0 → 22 → 44 m/min	2.2 - 1.5 kW
	DVF 3 4 D4 (WARIANT)	0 → 6 → 30 → 60 m/min	4 kW
	SSR 11 65	0.76 obr/min	1 x 65 Nm
	▲ TAD 1RP 2M3	0 → 24 m/min.	2 x 3 kW
	● TAD 2RP 2M3		

	▲	●
	Max. H [m]	
T ₁	37.9	-
T ₂	41.25	-
T ₃	-	50.4

- Przesuw wózka
- Podnoszenie
- Obrót
- Jazda
- Dyrektywa odnośnie poziomu akustycznego
- Całkowita moc zainstalowana
- Zasilanie