


TEREX COMEDIL CTT 332-16 HERKULES

UDŹWIG MAKSYMALNY 16 TON

Schemat obciążenia

	B (0,80 t)	C (3,00 t)
45 AFC 80 D3	4	9
67 AFC 80 D2	4	9

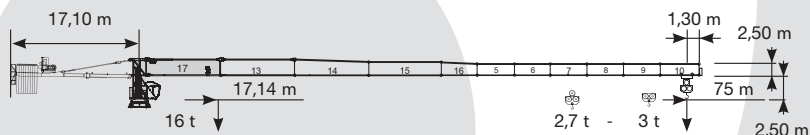


	15 m	20 m	25 m	30 m	35 m	40 m	45 m	50 m	55 m	60 m	65 m	70 m	75 m
8 t	32,94 m	8,00	8,00	8,00	7,47	6,43	5,61	4,96	4,42	3,98	3,60	3,28	3,00
8 t	31,98 m	8,00	8,00	8,00	7,20	6,15	5,33	4,67	4,13	3,69	3,31	2,98	2,70
16 t	17,14 m	16,00	13,54	10,58	8,61	7,20	6,15	5,33	4,67	4,13	3,69	3,31	2,98

	B (0,80 t)	C (3,00 t)
45 AFC 80 D3	3	9
67 AFC 80 D2	3	9




	15 m	20 m	25 m	30 m	35 m	40 m	45 m	50 m	55 m	60 m	65 m	70 m	
8 t	35,45 m	8,00	8,00	8,00	8,00	6,99	6,11	5,41	4,83	4,35	3,95	3,60	
8 t	34,39 m	8,00	8,00	8,00	7,84	6,71	5,82	5,12	4,54	4,06	3,65	3,30	
16 t	18,43 m	16,00	14,65	11,47	9,35	7,84	6,71	5,82	5,12	4,54	4,06	3,65	3,30

	B (0,80 t)	C (3,00 t)
45 AFC 80 D3	2	9
67 AFC 80 D2	2	9




	15 m	20 m	25 m	30 m	35 m	40 m	45 m	50 m	55 m	60 m	65 m		
8 t	37,87 m	8,00	8,00	8,00	8,00	7,53	6,60	5,85	5,24	4,73	4,30		
8 t	36,55 m	8,00	8,00	8,00	8,00	7,21	6,28	5,54	4,93	4,43	4,00		
16 t	19,49 m	16,00	15,57	12,22	10,00	8,41	7,21	6,28	5,54	4,93	4,43	4,00	

	B (0,80 t)	C (3,00 t)
45 AFC 80 D3	2	9
67 AFC 80 D2	2	9



	15 m	20 m	25 m	30 m	35 m	40 m	45 m	50 m	55 m	60 m			
8 t	38,90 m	8,00	8,00	8,00	8,00	7,76	6,81	6,04	5,42	4,90			
8 t	38,10 m	8,00	8,00	8,00	8,00	7,57	6,61	5,85	5,22	4,70			
16 t	20,21 m	16,00	16,00	12,74	10,44	8,80	7,57	6,61	5,85	5,22	4,70		

	B (0,80 t)	C (3,00 t)
45 AFC 80 D3	0	9
67 AFC 80 D2	0	9

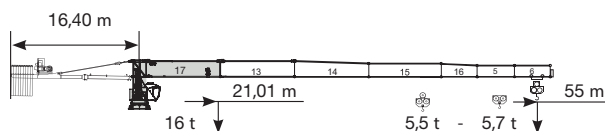

	15 m	20 m	25 m	30 m	35 m	40 m	45 m	50 m	55 m				
8 t	40,61 m	8,00	8,00	8,00	8,00	8,00	7,14	6,35	5,70				
8 t	39,71 m	8,00	8,00	8,00	8,00	7,93	6,94	6,15	5,50				
16 t	21,01 m	16,00	16,00	13,29	10,91	9,21	7,93	6,94	6,15	5,50			

DANE TECHNICZNE:

UDŹWIG MAKSYMALNY: 16 TON

DŁUGOŚĆ WYSIĘNIKA: 75 M


UDŹWIG NA MAKSYMALNYM WYSIĘGU: 3 TONY

TEREX COMEDIL CTT 332-16 HERKULES

UDŹWIG MAKSYMALNY 16 TON

Schemat obciążenia


	B (0,80 t)	C (3,00 t)
45 AFC 80 D3	0	9
67 AFC 80 D2	0	9



8 t	41,47 m	t
8 t	40,55 m	t
16 t	21,45 m	t

15 m	20 m	25 m	30 m	35 m	40 m	45 m	50 m						
8,00	8,00	8,00	8,00	8,00	8,00	7,31	6,50						
8,00	8,00	8,00	8,00	8,00	8,00	7,11	6,30						
16,00	16,00	13,59	11,16	9,42	8,12	7,11	6,30						


	B (0,80 t)	C (3,00 t)
45 AFC 80 D3	0	7
67 AFC 80 D2	0	7



8 t	42,95 m	t
8 t	42,00 m	t
16 t	22,22 m	t

15 m	20 m	25 m	30 m	35 m	40 m	45 m							
8,00	8,00	8,00	8,00	8,00	8,00	7,60							
8,00	8,00	8,00	8,00	8,00	8,00	7,40							
16,00	16,00	14,11	11,60	9,80	8,45	7,40							


	B (0,80 t)	C (3,00 t)
45 AFC 80 D3	0	7
67 AFC 80 D2	0	7



8 t	40,00 m	t
8 t	40,00 m	t
16 t	22,58 m	t

15 m	20 m	25 m	30 m	35 m	40 m								
8,00	8,00	8,00	8,00	8,00	8,00								
8,00	8,00	8,00	8,00	8,00	8,00								
16,00	16,00	14,35	11,80	10,00	8,60								


	B (0,80 t)	C (3,00 t)
45 AFC 80 D3	0	6
67 AFC 80 D2	0	6



8 t	35,00 m	t
8 t	35,00 m	t
16 t	23,88 m	t

15 m	20 m	25 m	30 m	35 m									
8,00	8,00	8,00	8,00	8,00									
8,00	8,00	8,00	8,00	8,00									
16,00	16,00	15,24	12,53	10,60									

	B (0,80 t)	C (3,00 t)
45 AFC 80 D3	0	5
67 AFC 80 D2	0	5



8 t	30,00 m	t
8 t	30,00 m	t
16 t	24,00 m	t

15 m	20 m	25 m	30 m										
8,00	8,00	8,00	8,00										
8,00	8,00	8,00	8,00										
16,00	16,00	15,32	12,60										

TEREX COMEDIL CTT 332-16 HERKULES


UDŹWIG MAKSYMALNY 16 TON

Standardowa konfiguracja wieży

HD23


Wieża: HD23 & Podstawa: FP1

	●	◆
R1	-1402 kN	-1822 kN
R2	-157 kN	0 kN
	1280 kN	

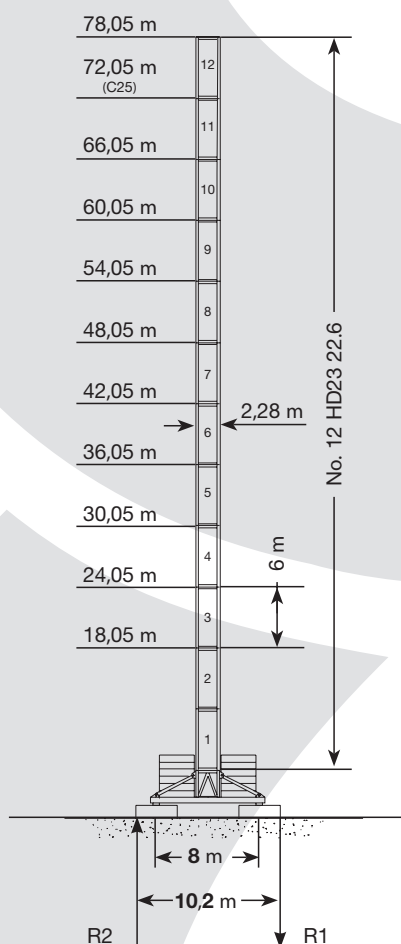


Wieża: HD23 & Podstawa: T1

	●	◆
R1	-1530 kN	-1852 kN
R2	0 kN	0 kN
	1400 kN	

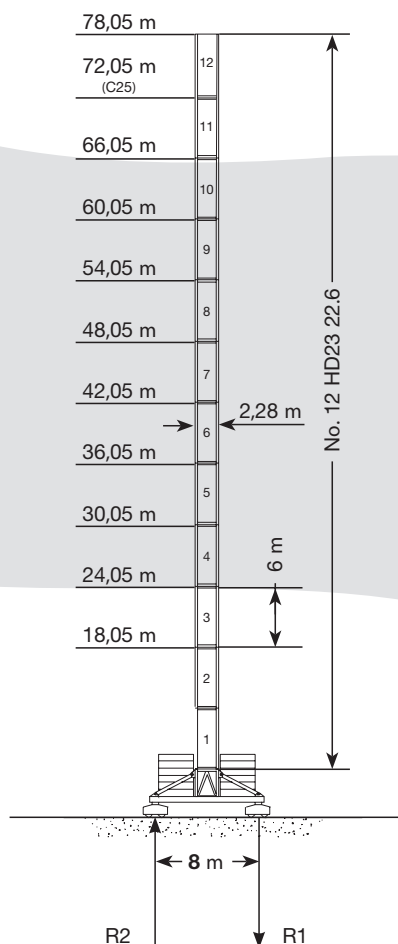

Wieża: HD23 & Podstawa: R2

	●	◆
R1	-2931 kN	-4139 kN
R2	2167 kN	3150 kN
	1059 kN	

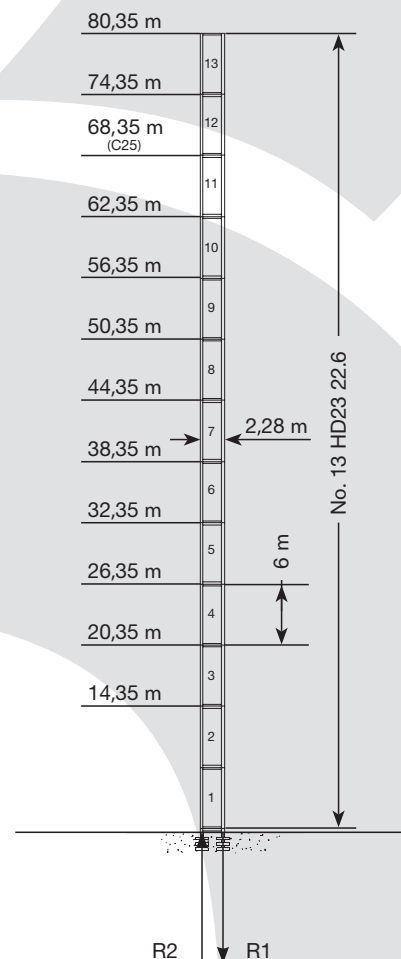

Maksymalna wysokość pod hak


TEREX COMEDIL CTT 332-16 HERKULES

UDŹWIG MAKSYMALNY 16 TON

Standardowa konfiguracja wieży


Wieża: HD23 & Podstawa: R3

	●	◆
R1	-3360 kN	-5393 kN
R2	2485 kN	4614 kN
	1264 kN	

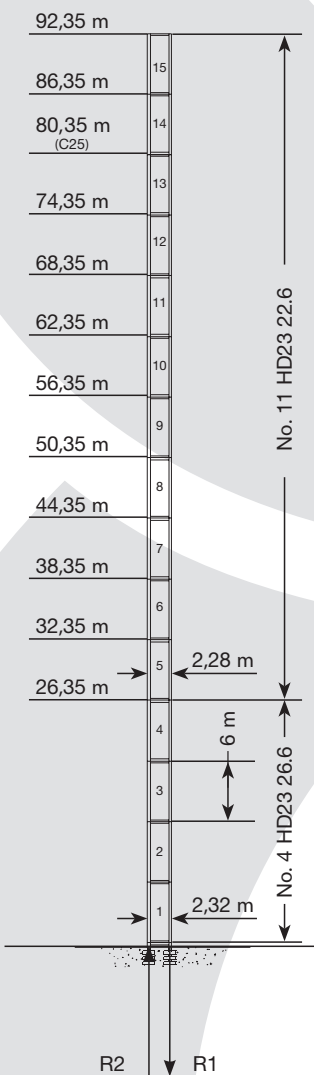


Wieża: HD23 & Podstawa: R4

	●	◆
R1	-3580 kN	-6638 kN
R2	2660 kN	5840 kN
	1350 kN	

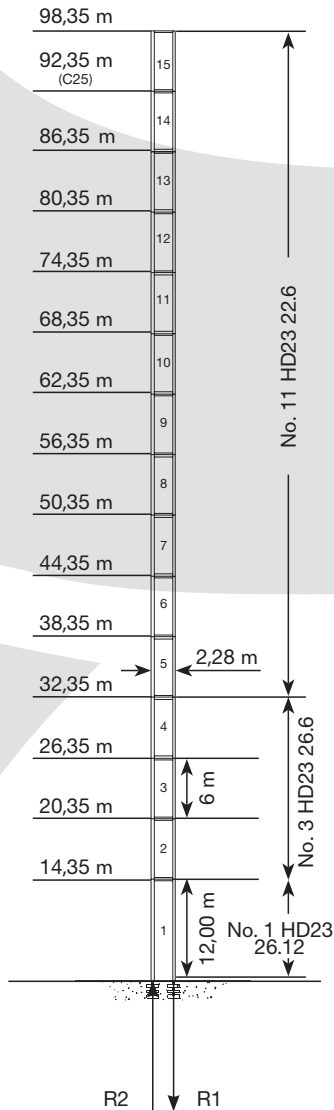


Wieża: HD23 & Podstawa: FP3

	●	◆
R1	-1427 kN	-1944 kN
R2	-267 kN	0 kN
	1430 kN	

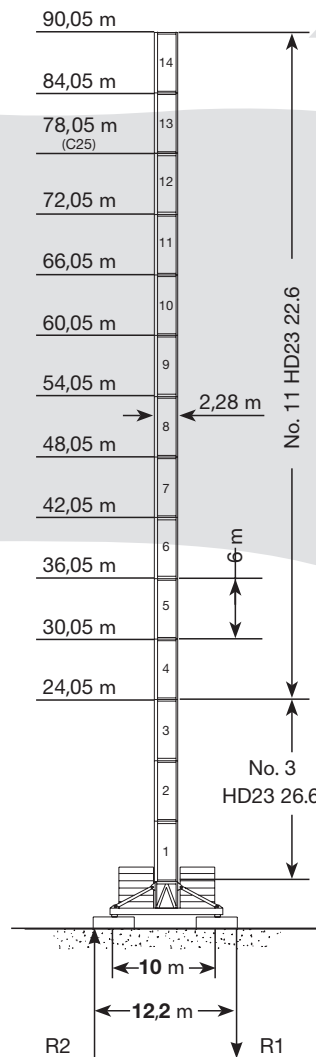

Wieża: HD23 & Podstawa: T3

	●	◆
R1	-1565 kN	-1944 kN
R2	-130 kN	0 kN
	1550 kN	


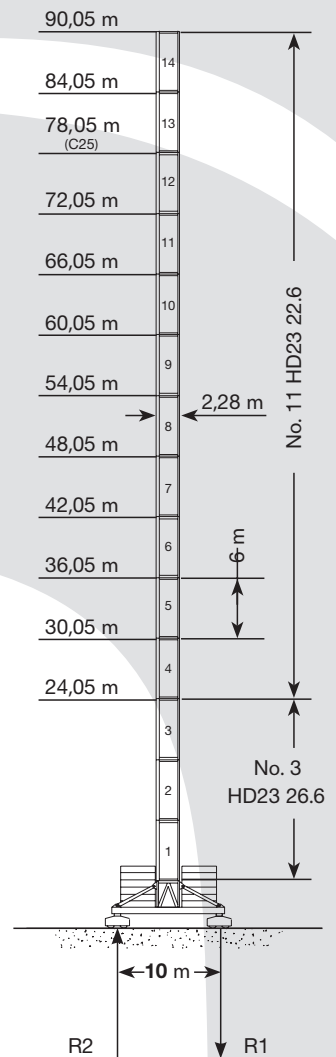


TEREX COMEDIL CTT 332-16 HERKULES

UDŹWIG MAKSYMALNY 16 TON

Mechanizmy

				
	45 AFC 80	93 kVA*	400V - 50Hz / 460V - 60Hz	2000/14/CE zmodyfikowany
	67 AFC 80	110 kVA*	400V - 50Hz / 460V - 60Hz	2000/14/CE zmodyfikowany

			t	m/min	kW	długość liny
	45 AFC 80 D3 (Vector)		8	0 → 29	45	
			6	0 → 37		
			4	0 → 53		
			2	0 → 94		
			1,7	0 → 110		
			16	0 → 15		
			12	0 → 19		
			8	0 → 27		
			4	0 → 47		
			3,4	0 → 55		
	67 AFC 80 D2 (Vector)		8	0 → 41	67	
			6	0 → 54		
			4	0 → 76		
			2	0 → 132		
			1,85	0 → 145		
			16	0 → 21		
			12	0 → 27		
			8	0 → 38		
			4	0 → 66		
			3,7	0 → 73		



Podnoszenie



Dyrektywa odnośnie poziomu akustycznego



Całkowita moc zainstalowana



Zasilanie

TEREX COMEDIL CTT 332-16 HERKULES

UDŹWIG MAKSYMALNY 16 TON

Mechanizmy

H20 - HD23 - TS23

	DVF 3 10	0 → 12,5 → 47 → 99 m/min	9,2 kW
	SCC 2 2 112 LC	0,75 r.p.m.	2 x 15 kW
	TSR 2RG 4M8	12 → 24 m/min (50 Hz) 14 → 28 m/min (60 Hz)	4 x 80 Nm
			

HD23 - TS23

	TSR 4RG 4M8	12 → 24 m/min (50 Hz) 14 → 28 m/min (60 Hz)	4 x 80 Nm
---	-------------	--	-----------

Tower height max.

HD23	T1	T3
 TSR 2RG 4M8	60,05 m	66,05 m
 TSR 4RG 4M8	> 60,05 m	> 66,05 m

TS23	T
 TSR 2RG 4M8	57,85 m
 TSR 4RG 4M8	57,85 m

-  Przesuw wózka
-  Obrót
-  Jazda