


WOLFF WK 6531.12 FL

UDŹWIG MAKSYMALNY 12 TON

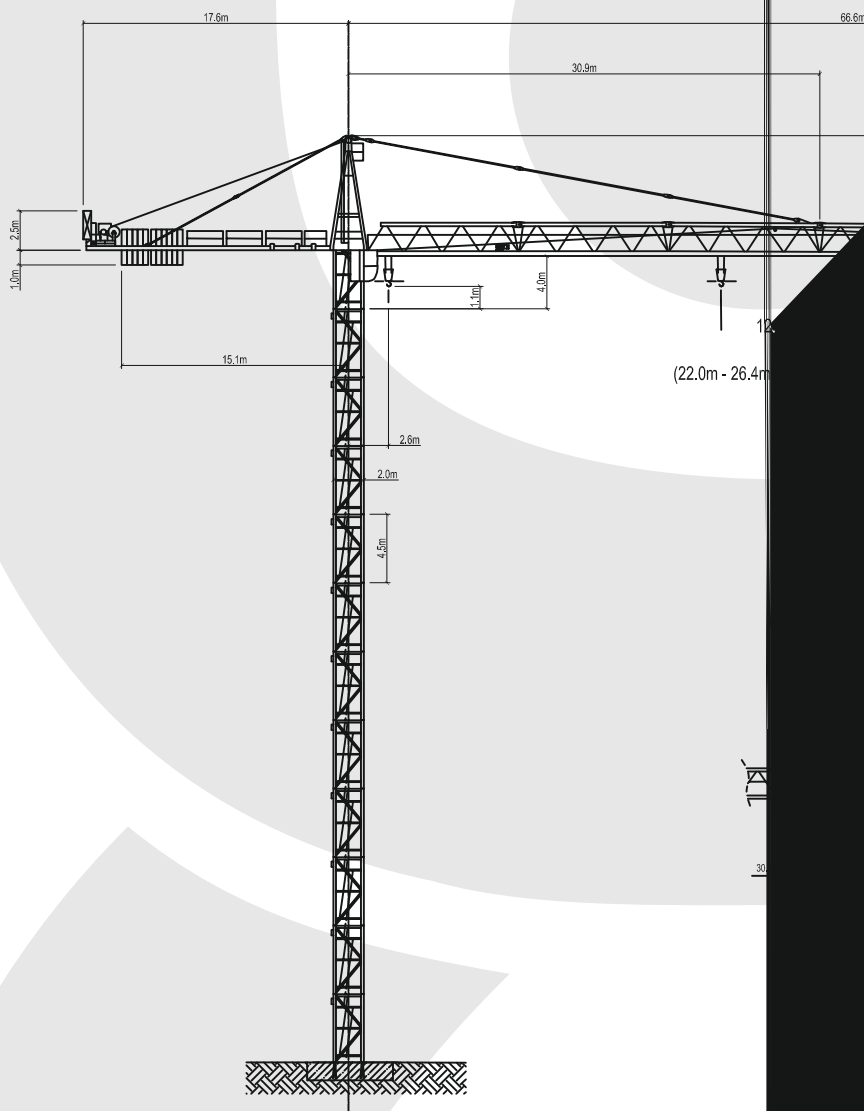

DANE TECHNICZNE:

UDŹWIG MAKSYMALNY: 12 TON
DŁUGOŚĆ WYSIĘGNIKA: 65 M

WOLFF WK 6531.12 FL

UDŹWIG MAKSYMALNY 12 TON



Tablica udźwigów

		Wysięg (m)		25	30	35	40	45	50	55	60	65	Udźwig (t)
Dł. wysięgnika (m)	65	2,6 - 22,0	12,0	10,4	8,5	7,1	6,1	5,3	4,6	4,1	3,7	3,3	
	60	2,6 - 22,6		10,7	8,8	7,3	6,3	5,5	4,8	4,3	3,8		
	55	2,6 - 23,2		11,1	9,0	7,6	6,5	5,6	5,0	4,4			
	50	2,6 - 24,2		11,6	9,4	7,9	6,8	5,9	5,2				
	45	2,6 - 25,5		12,0	10,0	8,4	7,2	6,3					
	40	2,6 - 26,0		12,0	10,3	8,6	7,4						
	35	2,6 - 26,0		12,0	10,2	8,6							
	30	2,6 - 26,4		12,0	10,4								

		Wysięg (m)		25	30	35	40	45	50	55	60	65	Udźwig (t)
Dł. wysięgnika (m)	65	2,6 - 41,1	6,0	6,0	6,0	6,0	6,0	5,4	4,7	4,2	3,8	3,4	
	60	2,6 - 42,2		6,0	6,0	6,0	6,0	5,6	4,9	4,4	3,9		
	55	2,6 - 43,3		6,0	6,0	6,0	6,0	5,7	5,1	4,5			
	50	2,6 - 45,0		6,0	6,0	6,0	6,0	6,0	5,3				
	45	2,6 - 45,0		6,0	6,0	6,0	6,0	6,0					
	40	2,6 - 40,0		6,0	6,0	6,0	6,0						
	35	2,6 - 35,0		6,0	6,0	6,0							
	30	2,6 - 30,0		6,0	6,0								

HERKUL 6531.12 FL

AL 12 TON



D

fundamen

Cz

Wy

gnika B =

1
2
3
4
5
6
7
8
9
10
11
12
13



HERKUL

WOLFF WK 6531.12 FL

UDŹWIG MAKSYMALNY 12 TON

 **HERKULES**

Konfiguracja wieży


Dla żurawia wolnostojącego na ramie krzyżowej.

Część obrotowa

Wysokość do haka **A = 1,5 m**

Wysokość do wysięgnika **B = 4,0 m**

Łączna wysokość **C = 11,7 m**

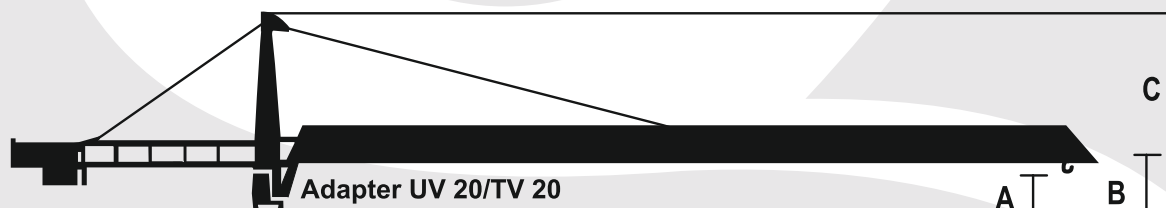

1	4,5		UV 20.4	UV 20.4	UV 20.4
2	9,0		UV 20.4	UV 20.4	UV 20.4
3	13,5		UV 20.4	UV 20.4	UV 20.4
4	18,0		UV 20.4	UV 20.4	UV 20.4
5	22,5		UV 20.4	UV 20.4	UV 20.4
6	27,0		UV 20.4	UV 20.4	UV 20.4
7	31,5	4,0 m		UV 20.4	UV 20.4
8	36,0	KRE 260.1 (6 x 6 m)		UV 20.4	UV 20.4
9	40,5			UV 20.4	TVA 20.4
10	45,0			TVA 20.4	TV 20.4
11	49,5			TV 20.4	TV 20.4
12	54,0	4,0 m			TV 20.4
13	58,5	KRE 260.2 (6 x 6 m)			TV 20.4
14	63,0				TVÜ 20.4
15	67,5				UVA 25
16	72,0	4,0 m			
17	76,5	KRE 480 (8 x 8 m)			
18	81,0				
Elem. wieży	Wys. pod hakiem (m)				

WOLFF WK 6531.12 FL

UDŹWIG MAKSYMALNY 12 TON

 **HERKULES**

Konfiguracja wieży


Dla żurawia wolnostojącego na ramie krzyżowej.

Część obrotowa

Wysokość do haka **A = 1,5 m**

Wysokość do wysięgnika **B = 4,0 m**

Łączna wysokość **C = 11,7 m**

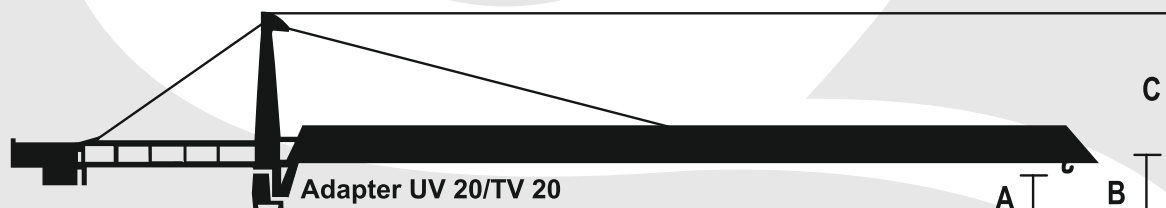

1	4,5			UV 20.4	UV 20.4		UV 20.4
2	9,0			UV 20.4	UV 20.4		UV 20.4
3	13,5			UV 20.4	UV 20.4		UV 20.4
4	18,0			UV 20.4	UV 20.4		UV 20.4
5	22,5			UV 20.4	UV 20.4		UV 20.4
6	27,0			UV 20.4	UV 20.4		UV 20.4
7	31,5			UV 20.4	UV 20.4		UV 20.4
8	36,0			UV 20.4	UV 20.4		UV 20.4
9	40,5			UV 20.4	UV 20.4		TVA 20.4
10	45,0			TVA 20.4	TVA 20.4		TV 20.4
11	49,5			TV 20.4	TV 20.4		TV 20.4
12	54,0			TV 20.4	TV 20.4		TV 20.4
13	58,5			TV 20.4	TV 20.4		TV 20.4
14	63,0	1,2 m		1,2 m			TVÜ 20.4
15	67,5	KR 10 - 46 Połączenie UV 20/TV 20		KR 10 - 60 Połączenie UV 20/TV 20			TV 25
16	72,0	1,2 m					
17	76,5	KR 1000 - 8 Połączenie UV 25/TV 25/UVA 25					
18	81,0						
Elem. wieży	Wys. pod hakiem (m)						